

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200078673 B2
(10) Patent No. 782901

(54) Title
Lubricant coating for expandable tubular members

(51)⁷ International Patent Classification(s)
B23P 017/02

(21) Application No: 200078673

(22) Application Date: 2000.10.05

(87) WIPO No: WO01/26860

(30) Priority Data

(31) Number	(32) Date	(33) Country
60/159039	1999.10.12	US
60/165228	1999.11.12	US

(43) Publication Date : 2001.04.23

(43) Publication Journal Date : 2001.07.12

(44) Accepted Journal Date : 2005.09.08

(71) Applicant(s)
Shell Internationale Research Maatschappij B.V.

(72) Inventor(s)
Lev Ring; Andrei Fililpov; Mike Cowan; Bill Dean

(74) Agent/Attorney
Davies Collison Cave, Level 15, 1 Nicholson Street, MELBOURNE VIC 3000

(56) Related Art
US 4573248
US 4069573

26

**(19) World Intellectual Property Organization
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(43) International Publication Date
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number
WO 01/26860 A1

(51) International Patent Classification: H23P 17/02

(74) Agents: MATTINGLY, Tod et al.; Haynes and Boone, LLP, 901 Main Street, Suite 3100, Dallas, TX 75202-3789 (US).

(21) International Application Number: PCT/US00/27645

(22) International Filing Date: 5 October 2000 (05.10.2000)

(25) **Filing Language:** English

(26) Publication Language: English

(81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GM, GR, HU, ID, IL, IN, IS, JP, KE, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(30) Priority Data:

60/159,039	12 October 1999 (12.10.1999)	US
60/165,228	12 November 1999 (12.11.1999)	US

(84) Designated States (regional): ARIPO parent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, TW), Eurasian parent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European parent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI parent (BF, BJ, CF, CG, CI, CM, GA, GN, GY, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (for all designated States except US): ~~ENVEN~~
~~PURE GLOBAL TECHNOLOGY (USA) US-2135 High-~~
~~way 6 South, Houston, TX 77079 (US). Carol Van Byl~~

nd Haag 30,
Published:
With international search report.
— With amended claims.

(72) Inventors; and
(75) Inventors/Applicants (for US only): RING, Lev
[US/US]; 14126 Heatherhill Place, Houston, TX 77077
[US], PILLIPOV, Andrei [US/US]; -. COWAN, Mike
[US/US]; -. DEAN, Bill [US/US]; -. 2264 Crescent
Court Katy TX 77494 (US)

For two-letter codes and other abbreviations, refer to the "Guide Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LUBRICANT COATING FOR EXPANDABLE TUBULAR MEMBERS

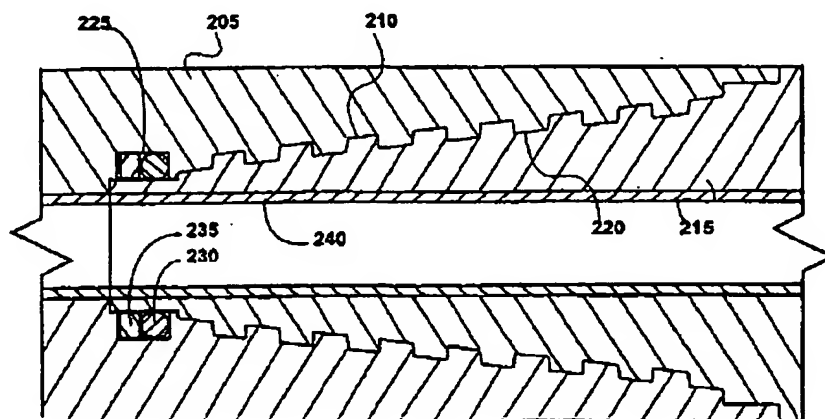

(57) Abstract: A lubricant coating (240) for expandable tubulars (215). The interior surfaces of the expandable tubulars are coated with the lubricant coating (240). The expandable tubulars (215) are then placed within a preexisting structure (205). The expandable tubulars are then radially expanded into contact with the preexisting structure.



WO 01/26860 A1

LUBRICANT COATING FOR EXPANDABLE TUBULAR MEMBERS

Background of the Invention

This invention relates generally to coupling at least one tubular member to a
5 preexisting structure. The at least one tubular member may be for example, a wellbore
casing, an underground pipe or a structural support. For convenience, the invention will be
described hereinafter with reference to wellbore casings.

Conventionally, when a wellbore is created, a number of casings are installed in the borehole to prevent collapse of the borehole wall and to prevent undesired outflow of drilling fluid into the formation or inflow of fluid from the formation into the borehole. The borehole is drilled in intervals whereby a casing which is to be installed in a lower borehole interval is lowered through a previously installed casing of an upper borehole interval. As a consequence of this procedure the casing of the lower interval is of smaller diameter than the casing of the upper interval. Thus, the casings are in a nested arrangement with casing diameters decreasing in downward direction. Cement annuli are provided between the outer surfaces of the casings and the borehole wall to seal the casings from the borehole wall. As a consequence of this nested arrangement a relatively large borehole diameter is required at the upper part of the wellbore. Such a large borehole diameter involves increased costs due to heavy casing handling equipment, large drill bits and increased volumes of drilling fluid and drill cuttings. Moreover, increased drilling rig time is involved due to required cement pumping, cement hardening, required equipment changes due to large variations in hole diameters drilled in the course of the well, and the large volume of cuttings drilled and removed.

The present invention is directed to overcoming one or more of the limitations of the existing procedures for forming wellbores. It has been proposed to form wellbore casings using expandable tubular members, and the present invention is particularly directed to improving methods and apparatus using at least one expandable tubular member.

Summary of the Invention

30 According to a first aspect of the present invention, a method of coupling an expandable tubular assembly including at least one tubular member to a preexisting

FIG. 1 is a flow chart illustrating a preferred embodiment of a method for coupling a plurality of tubular members to a preexisting structure.

structure, comprising coating the interior surfaces of the at least one tubular members with a lubricant; positioning the coated at least one tubular member within a preexisting structure; and radially expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.

- 5 Also according to the first aspect of the present invention, an apparatus is provided that comprises a preexisting structure and at least one tubular member coupled to the preexisting structure by the process of coating the interior surface of the at least one tubular member with a lubricant; positioning the coated at least one tubular member within a preexisting structure; and radially expanding the coated at least one tubular member into
10 contact with the preexisting structure using an expansion cone that engages the coating.

- According to a second aspect of the present invention, there is provided a method of coupling an expandable tubular assembly including at least one tubular member to a preexisting structure, comprising coating the interior surface of the at least one tubular member with a first part of a lubricant; positioning the coated at least one tubular member
15 within a preexisting structure; circulating a fluidic material including a second part of the lubricant into contact with the coating of the first part of the lubricant; and radially expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.

- Also according to the second aspect of the present invention, there is provided
20 apparatus, comprising: a preexisting structure and at least one tubular member coupled to the preexisting structure by the process of coating the interior surface of the at least one tubular member with a first part of a lubricant; positioning the at least one tubular member within a preexisting structure; circulating a fluidic material having a second part of the lubricant into contact with the coating of the first part of the lubricant; and radially
25 expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.

Brief Description of the Drawings

Embodiments of the present invention will now be described by way of example only, with reference to the accompanying drawings in which:

- 30 Fig. 1 is a flow chart illustrating a preferred embodiment of a method for coupling a plurality of tubular members to a preexisting structure.

FD-302a (Rev. 5-8-10)

Fig. 2 is cross sectional illustration of a plurality of tubular members including in internal coating of a lubricant.

Fig. 3 is a fragmentary cross sectional illustration of the radial expansion of the tubular members of Fig. 2 into contact with a preexisting structure; and

5 Fig. 4 is a flow chart illustrating an alternative preferred embodiment of a method for coupling a plurality of tubular members to a preexisting structure.

Detailed Description

A method and apparatus for coupling tubular members to a preexisting structure is provided. The internal surfaces of the tubular members are coated with a lubricant. The tubular members are then radially expanded into contact with a preexisting structure. In several alternative embodiments, the method and apparatus are used to form and/or repair a wellbore casing, a pipeline, or a structural support.

In Fig. 1, a preferred embodiment of a method 100 for forming and/or repairing a wellbore casing, pipeline, or structural support includes the steps of: (1) providing one or more tubular members in step 105; (2) applying a lubricant coating to the interior walls of the tubular members in step 110; (3) coupling the first and second tubular members in step 115; and (4) radially expanding the tubular members into contact with the preexisting structure in step 120.

As illustrated in Fig. 2, in a preferred embodiment, in step 105, a first tubular member 205 having a first threaded portion 210 and a second tubular member 215 having a second threaded portion 220 are provided. The first and second tubular members, 205 and 215, may be any number of conventional commercially available tubular members. In a preferred embodiment, the first tubular member 205 includes a recess 225 containing a sealing member 230 and a retaining ring 235. In a preferred embodiment, the first and second tubular members, 205 and 210, are further provided substantially as disclosed in US Patent No. 6,497,289 and Australian Patent No. 767364; Australian Patent No. 770008; Australian Patent No. 771884; US Patent No. 6,328,113; US Patent No. 6,640,903; US Patent No. 6,575,240; US Patent No. 6,557,640 and Australian Patent No. 773168; US Patent No. 6,604,763 and filed as AU 37920/00; Australian Patent No. 776580; US Patent No. 6,564,875; US Patent No. 6,568,471.

In a preferred embodiment, in step 110, a coating 240 of a lubricant is applied to

P012/081/081-00 4/20/05 17:10

the interior surfaces of the first and second tubular members, 205 and 215. The coating 240 of lubricant may be applied prior to, or after, the first and second tubular members, 205 and 215, are coupled. The coating 240 of lubricant may be applied using any number of conventional methods such as, for example, dipping, injecting, spraying, sputter coating
5 or electrostatic deposition. In a preferred embodiment, the coating 240 of lubricant is chemically, mechanically, and/or adhesively bonded to the interior surfaces of the first and second tubular members, 205 and 215, in order to optimally provide a durable and consistent lubricating effect. In a preferred embodiment, the force that bonds the lubricant to the interior surfaces of the first and second tubular members, 205 and 215, is greater
10 than the shear force applied during the radial expansion process.

In a preferred embodiment, the coating 240 of lubricant is applied to the interior surfaces of the first and second tubular members, 205 and 215, by first applying a phenolic primer to the interior surfaces of the first and second tubular members, 205 and 215, and then bonding the coating 240 of lubricant to the phenolic primer using an antifriction paste
15 having the coating 240 of lubricant carried in an epoxy resin. In a preferred embodiment, the antifriction paste includes, in parts by weight, 40-80 epoxy resin, 15-30 molybdenum disulfide, 10-15 graphite, 5-10 aluminum, 5-10 copper, 8-15 aluminosilicate, and 5-10 polyethylenepolyamine. In a preferred embodiment, the antifriction paste is provided substantially as disclosed in U.S. Patent No. 4,329,238.

The coating 240 of lubricant may be any number of conventional commercially available lubricants such as, for example, metallic soaps or zinc phosphates. In a preferred embodiment, the coating 240 of lubricant is compatible with conventional water, oil and synthetic base mud formulations. In a preferred embodiment, the coating 240 of lubricant reduces metal-to-metal frictional forces, preferably by about 50%, and provides a
25 coefficient of dynamic friction of between about 0.08 to 0.1 during the radial expansion process. In a preferred embodiment, the coating 240 of lubricant does not increase the toxicity of conventional base mud formulations and will not shear in synthetic mud. In a preferred embodiment, the coating 240 of lubricant is stable for temperatures ranging from about -100 to 500°F (-73 to 260°C). In a preferred embodiment, the coating 240 of
30 lubricant is stable when exposed to shear stresses. In a preferred embodiment, the coating 240 of lubricant is stable for storage periods of up to about 5 years. In a preferred embodiment, the coating 240 of lubricant provides corrosion protection for expandable

F:\P013\081\F-142.doc

tubular members during storage and transport.

In a preferred embodiment, the coating 240 of lubricant includes sodium, calcium, and/or zinc stearates; and/or zinc and/or manganese phosphates; and/or C-Lube-10; and/or C-Phos-58-M; and/or C-Phos-58-R; and/or polytetrafluoroethylene (PTFE); and/or molybdenum disulfide; and/or metallic soaps (stearates, oleates, etc...) in order to optimally provide a coating of lubricant. In a preferred embodiment, the coating 240 of lubricant provides a sliding coefficient of friction less than about 0.20 in order to optimally reduce the force required to radially expand the tubular members, 205 and 215, using an expansion cone.

10 In a preferred embodiment, in step 115, the first and second tubular members, 205 and 215, are coupled. The first and second tubular members, 205 and 215, may be coupled using a threaded connection, or, alternatively, the first and second tubular members, 205 and 215, may be coupled by welding or brazing. In a preferred embodiment, the first and second tubular members, 205 and 215, are coupled substantially as disclosed in the above
15 US and Australian patent specifications.

As illustrated in Fig. 3, in steps 120, the first and second tubular members 205 and 215 are then positioned within a preexisting structure 505, and radially expanded into contact with the interior walls of the preexisting structure 505 using an expansion cone 510. The tubular members 205 and 215 may be radially expanded into intimate contact
20 with the interior walls of the preexisting structure 505, for example, by: (1) pushing or pulling the expansion cone 510 through the interior of the tubular members 205 and 215; and/or (2) pressurizing the region within the tubular members 205 and 215 behind the expansion cone 510 with a fluid. In a preferred embodiment, one or more sealing members 515 are further provided on the outer surface of the tubular members 205 and 215, in order
25 to optimally seal the interface between the radially expanded tubular members 205 and 215 and the interior walls of the preexisting structure 505.

In a preferred embodiment, the radial expansion of the tubular members 205 and 215 into contact with the interior walls of the preexisting structure 505 is performed substantially as disclosed in one or more of the above US and Australian Patent
30 specification.

As illustrated in Fig. 4, an alternative embodiment of a method 400 for forming and/or repairing a wellbore casing, pipeline, or structural support includes the steps of: (1)

P:\Q\PROJ\000001\000001.dwg:20050720

providing one or more tubular members in step 405; (2) applying a coating including a first part of a lubricant to the interior walls of the tubular members in step 410; (3) coupling the first and second tubular members in step 415; and (4) radially expanding the tubular members into contact with the preexisting structure while also circulating fluidic materials into contact with the interior walls of the tubular members having a second part of the lubricant in step 420.

In a preferred embodiment, in step 410, a coating including a first part of a lubricant is applied to the interior walls of the tubular members, 205 and 215.

In a preferred embodiment, the first part of the lubricant forms a first part of a metallic soap. In an preferred embodiment, the first part of the lubricant coating includes zinc phosphate.

In a preferred embodiment, in step 420, a second part of the lubricant is circulated within a fluidic carrier into contact with the coating of the first part of the lubricant applied to the interior walls of the tubular members, 205 and 215. In a preferred embodiment, the first and second parts react to form a lubricating layer between the interior walls of the tubular members, 205 and 215, and the exterior surface of the expansion cone. In this manner, a lubricating layer is provided in exact concentration, exactly when and where it is needed. Furthermore, because the second part of the lubricant is circulated in a carrier fluid, the dynamic interface between the interior surfaces of the tubular members, 205 and 215, and the exterior surface of the expansion cone 510 is also preferably provided with hydrodynamic lubrication. In a preferred embodiment, the first and second parts of the lubricant react to form a metallic soap. In a preferred embodiment, the second part of the lubricant is sodium, calcium and/or zinc stearate.

In several experimental exemplary embodiments of the methods 100 and 400, the following observations were made regarding lubricant coatings for expandable tubular members:

- (1) boundary lubrication with a lubricant coating having high adhesion (high film/shear strength) to the expandable tubular is the single most important lubricant/lubrication process in the radial expansion process;
- (2) hydrodynamic lubrication plays a secondary role in the lubrication process;
- (3) expandable tubular lubricant coating offers the more reliable and more effective form of boundary lubrication;

PROCESSED BY THE FBI LABORATORY

- (4) a liquid boundary viscosity and/or film strength that provides effective, consistent boundary lubrication typically limits the effectiveness of additives for the mud alone to provide the necessary lubrication while maintaining drilling fluid properties (rheology, toxicity);
- (5) consistent reductions of 20 to 25 percent in propagation force during the radial expansion process (compared to uncoated expandable tubular control results) were obtained with the following dry film coatings: (1) polytetrafluoroethylene (PTFE), (2) molybdenum disulfide, and (3) metallic soap (stearates), these results are for laboratory tests on one inch dry pipe, in the absence of any drilling fluid;
- (6) a 20 to 25 percent reduction in propagation force during the radial expansion process was observed;
- (7) synthetic oil muds do not typically provide sufficient, reliable lubrication for uncoated pipe;
- (8) the coefficient of friction for expandable tubular lubricant coatings remains essentially constant across a wide temperature range;
- (9) the expected application range for expandable tubular casing expansion is between 40° F and 400°F (4 to 204°C), this range is well within the essentially constant range for coefficient of friction for good coatings; and
- (10) good extreme pressure boundary lubricants have a characteristic of performing better (lower coefficients of friction) as the load increases, coefficients of friction between 0.02 and 0.08 are reported for some coatings.

25 In a preferred embodiment, the optimum lubrication for in-situ expandable tubular radial expansion operations using the methods 100 and/or 400 includes a combination of lubrication techniques and lubricants. These can be summarized as follows: (1) extreme pressure lubricants/lubrication techniques; and (2) hydrodynamic lubrication from the fluid in the pipe during expansion.

30 Extreme pressure lubrication is preferably provided by: (1) liquid extreme pressure lubricants added to the fluid (e.g., drilling fluid, etc) in contact with the internal surface of the expandable tubular during the radial expansion process, and/or (2) solid lubricants added to, or contained within, the fluid in contact with the internal surface of the

expandable tubular member during the radial expansion process, and/or (3) solid lubricants applied to the internal surface of the expandable tubular member to be radially expanded, and/or (4) combinations of (1), (2) and (3) above.

Liquid extreme pressure lubricant additives preferably work by chemically
5 adhering to or being strongly attracted to the surface of the expandable tubular to be expanded. These types of liquid extreme pressure lubricant additives preferably form a 'film' on the surface of the expandable tubular member. The adhesive strength of this film is preferably greater than the shearing force along the internal surface of the expandable tubular member during the radial expansion process. This adhesive force is referred to as
10 film strength. The film strength can be increased by increasing the viscosity of the fluid. Common viscosifiers, such as polymeric additives, are preferably added to the fluid in contact with the internal surface of the expandable tubular member during the radial expansion process to increase lubrication. In a preferred embodiment, these liquid extreme pressure lubricant additives include one or more of the following: polyacrylamide
15 polymers, AMPS-acrylamide copolymers, modified cellulose derivatives such as, for example, hydroxyethylcellulose, carboxymethylhydroxyethyl cellulose, polyvinyl alcohol polymers, polyvinyl acetate polymers, polyvinyl alcohol/vinyl acetate copolymers, polyvinyl pyrrolidone and copolymers including polyolefins, latexes such as, for example, styrene butadiene latex, urethane latexes, styrene-maleic anhydride copolymers, viscosity
20 index improvers for motor oils such as polyacrylate esters, block copolymers including styrene, isoprene butadiene and ethylene, ethylene acrylic acid copolymers.

In a preferred embodiment, extreme pressure lubrication is provided using solid lubricants that are applied to the internal surface of the expandable tubular member. These solid lubricants can be applied using various conventional methods of applying a film to a
25 surface. In a preferred embodiment, these solid lubricants are applied in a manner that ensures that the solid lubricants remain on the surface of the expandable tubular member during installation and radial expansion of the expandable tubular member. The solid lubricants preferably include one or more of the following: graphite, molybdenum disulfide, lead powder, antimony oxide, poly tetrafluoroethylene (PTFE), or silicone
30 polymers. Furthermore, blends of these solid lubricants are preferred.

In a preferred embodiment, the solid lubricants are applied directly to the expandable tubulars as coatings. The coating of the solid lubricant preferably includes a

PROCESSING OF POLYMER COMPOSITES

In several exemplary embodiment, the liquid lubricant additives include one or more of the following: (1) esters including: (a) organic acid esters (preferably fatty acid esters) such as, for example, trimethylol propane, isopropyl, penterithritol, n-butyl, etc.; (b) glycerol tri (acetoxystearate) and N, N' ethylene bis 12 hydroxystearate and octyl hydroxystearate; (c) phosphate and phosphite such as, for example, butylated triphenyl phosphate and isodiphenyl phosphate; (2) sulfurized natural and synthetic oils; (3) alkanolamides such as, for example, coco diethanolamide; (4) amines and amine salts; (5) olefins and polyolefins; (6) C-8 to C-18 linear alcohols and derivatives containing or consisting of esters, amines, carboxylates, etc.; (7) overbased sulfonates such as, for example, calcium sulfonate, sodium sulfonate, magnesium sulfonate; (8) polyethylene glycols; (9) silicones and siloxanes such as, for example, dimethylpolysiloxanes and fluorosilicone derivatives; (10) dinonyl phenols; and (11) ethylene oxide/propylene oxide block copolymers.

Where a liquid lubricant is injected into contact with the expandable tubular assembly, the liquid lubricant material may be selected from: polyacrylamide polymers, AMPS-acrylamide copolymers, modified cellulose derivatives, hydroxyethylcellulose, carboxymethyl hydroxyethyl cellulose, polyvinyl alcohol polymers, polyvinyl acetate polymers, polyvinyl alcohol/vinyl acetate copolymers, polyvinyl pyrrolidone, copolymers including polyolefins, latexes, styrene butadiene latex, urethane latexes, styrene-maleic anhydride copolymers, viscosity index improvers for motor oils, polyacrylate esters, block copolymers including styrene, isoprene butadiene and ethylene, ethylene acrylic acid copolymers, esters, organic acid esters, trimethylol propane, isopropyl, penterithritol, n-butyl, glycerol triacetoxystearate, N,N' ethylene bis 12 hydroxystearate, octyl hydroxystearate, phosphate, phosphite, butylated triphenyl phosphate, isodiphenyl phosphate, sulfurized natural oils, synthetic oils, alkanolamides, coco diethanolamide, amines, amine salts, olefins, polyolefins, C-8 to C-18 linear alcohols and derivatives including esters, amines, carboxylates, overbased sulfonates, calcium sulfonate, sodium sulfonate, magnesium sulfonate, polyethylene glycols, silicones, siloxanes, dimethylpolysiloxanes, fluorosilicone derivatives, dinonyl phenols, and ethylene oxide/propylene oxide block copolymers. In a preferred embodiment, the injected lubricant material includes a solid lubricant material. In a preferred embodiment, the solid lubricant material is selected from the group consisting of: graphite, molybdenum

PROPERTY OF THE GOVERNMENT OF AUSTRALIA

disulfide, lead powder, antimony oxide, poly tetrafluoroethylene, and silicone polymers. In a preferred embodiment, the method further includes: coating the interior surfaces of the tubular members with a lubricant prior to positioning the tubular members within the preexisting structure. In a preferred embodiment, the lubricant coating includes a first part
5 of a lubricating substance; and the injected lubricating material includes a second part of the lubricating substance.

A method of coupling an expandable tubular assembly including one or more tubular members to a preexisting structure has been described that includes: coating the interior surfaces of the tubular members with a first part of a lubricant, positioning the
10 tubular members within a preexisting structure, circulating a fluidic material including a second part of the lubricant into contact with the coating of the first part of the lubricant, and radially expanding the tubular members into contact with the preexisting structure. In a preferred embodiment, the lubricant includes a metallic soap. In a preferred embodiment, the lubricant is selected from the group consisting of sodium, calcium, and/or
15 zinc stearates, zinc phosphates, manganese phosphate, C-Lube-10, C-PHOS-58-M, and C-PHOS-58-R. In a preferred embodiment, the lubricant provides a sliding friction coefficient of less than about 0.20. In a preferred embodiment, the first part of the lubricant is chemically bonded to the interior surfaces of the tubular members. In a preferred embodiment, the first part of the lubricant is mechanically bonded to the interior
20 surfaces of the tubular members. In a preferred embodiment, the first part of the lubricant is adhesively bonded to the interior surface of the tubular members. In a preferred embodiment, the method further includes: combining the first and second parts of the lubricant to generate the lubricant.

Apparatus has been described that includes a preexisting structure and one or more
25 tubular members coupled to the preexisting structure. The tubular members are coupled to the preexisting structure by the process of: coating the interior surfaces of the tubular members with a first part of a lubricant, positioning the tubular members within a preexisting structure, circulating a fluidic materials having a second part of the lubricant into contact with the coating of the first part of the lubricant, and radially expanding the
30 tubular members into contact with the preexisting structure. In a preferred embodiment, the lubricant includes a metallic soap. In a preferred embodiment, the lubricant is selected from the group consisting of sodium, calcium, and/or zinc stearates, zinc phosphates,

PROPRIETARY INFORMATION

manganese phosphate, C-Lube-10, C-PHOS-58-M, and C-PHOS-58-R. In a preferred embodiment, the lubricant provides a sliding friction coefficient of less than about 0.20. In a preferred embodiment, the first part of the lubricant is chemically bonded to the interior surfaces of the tubular members. In a preferred embodiment, the first part of the lubricant is mechanically bonded to the interior surfaces of the tubular members. In a preferred embodiment, the first part of the lubricant is adhesively bonded to the interior surface of the tubular members. In a preferred embodiment, the apparatus further includes combining the first and second parts of the lubricant to generate the lubricant.

Although this detailed description has shown and described illustrative embodiments of the invention, this description contemplates a wide range of modifications, changes, and substitutions. In some instances, one may employ some features of the present invention without a corresponding use of the other features. Accordingly, it is appropriate that readers should construe the appended claims broadly, and in a manner consistent with the scope of the invention.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

PAPER 20-07-05 17:13 17:13 17:13

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method of coupling an expandable tubular assembly including at least one tubular member to a preexisting structure, comprising:
 - 5 coating the interior surface of the at least one tubular member with a lubricant;
 - positioning the coated at least one tubular member within a preexisting structure;
 - and
 - radially expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.
- 10 2. A method of coupling an expandable tubular assembly including at least one tubular member to a preexisting structure, comprising:
 - coating the interior surface of the at least one tubular member with a first part of a lubricant;
 - positioning the coated at least one tubular member within a preexisting structure;
 - 15 circulating a fluidic material including a second part of the lubricant into contact with the coating of the first part of the lubricant; and
 - radially expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.
- 20 3. The method of claim 1 or 2, wherein the at least one tubular member comprises a wellbore casing.
4. The method of claim 1 or 2, wherein the at least one tubular member comprises an underground pipe.
5. The method of claim 1 or 2, wherein the at least one tubular member comprises a structural support.
- 25 6. The method of claim 1, wherein the coating of lubricant is chemically bonded to the interior surface of the at least one tubular member.
7. The method of claim 1, wherein the coating of lubricant is mechanically bonded to the interior surface of the at least one tubular member.

8. The method of claim 1, wherein the coating of lubricant is adhesively bonded to the interior surface of the at least one tubular member.
9. The method of claim 1, wherein the coating of lubricant includes:
a primer coating coupled to the interior surface of the at least one tubular member;
and
a coating of an antifriction paste coupled to the primer.
10. The method of claim 1, wherein the coating of lubricant includes, in parts by weight:
40-80 epoxy resin, 15-30 molybdenum disulfide, 10-15 graphite, 5-10 aluminum, 5-10 copper, 8-15 aluminosilicate, and 5-10 polyethylenepolyamine.
11. The method of claim 1 or 2, wherein the lubricant comprises a metallic soap.
12. The method of claim 1 or 2, wherein the lubricant comprises zinc phosphate.
13. The method of claim 1 or 2, wherein the lubricant provides a coefficient of dynamic friction of between about 0.08 to 0.1.
14. The method of claim 1 or 2, wherein the lubricant comprises one or more of:
sodium stearates, calcium stearates, zinc stearates, zinc phosphate, manganese phosphate, C-Lube-10, C-Phos-58-M, C-Phos-58-R, polytetrafluoroethylene, molybdenum disulfide, and metallic soaps.
15. The method of claim 1 or 2, wherein the lubricant provides a sliding coefficient of friction less than about 0.20.
16. The method of claim 1 or 2, wherein the lubricant comprises one or more of:
polyacrylamide polymers, AMPS-acrylamide copolymers, modified cellulose derivatives, hydroxyethylcellulose, carboxymethyl hydroxyethyl cellulose, polyvinyl alcohol polymers, polyvinyl acetate polymers, polyvinyl alcohol acetate copolymers, polyvinyl vinyl acetate copolymers, polyvinyl pyrrolidone and copolymers including polyolefins, latexes, styrene butadiene latex, urethane

P:\OFFICE\2005-07-14\2005-07-14-2005-07-14

latexes, styrene-maleic anhydride copolymers, viscosity index improvers for motor oils, polyacrylate esters, block copolymers including styrene, block copolymers including isoprene butadiene, block copolymers including ethylene, and ethylene acrylic acid copolymers.

- 5 17. The method of claim 1 or 2, wherein the lubricant comprises one or more of:
graphite, molybdenum disulfide, lead powder, antimony oxide, poly
tetrafluoroethylene, and silicone polymers.
18. The method of claim 1, wherein the coating of lubricant comprises:
a solid lubricant; and
10 a binder.
19. The method of claim 18, wherein the binder is selected from:
epoxy, acrylic, urea-formaldehyde, melamine formaldehyde, furan based resin,
acetane formaldehyde, phenolic, alkyd resins, and silicone modified alkyd resin.
20. The method of claim 18, wherein the binder is selected from:
15 vinyl acetate, vinyl chloride, maleic anhydride, maleic acid, ethylene-acrylic acid
copolymers, ethylene-methacrylic acid copolymers, and ethylene-vinyl acetate
copolymers.
21. The method of claim 1 or 2, wherein the lubricant comprises a suspension of
particles in a carrier solvent.
- 20 22. The method of claim 1 or 2, wherein the lubricant comprises one or more of:
manganese phosphate, zinc phosphate, and iron phosphate.
23. The method of claim 1 or 2, wherein the lubricant comprises:
about 1 to 90 percent solids by volume.
24. The method of claim 23, wherein the lubricant comprises:
25 about 5 to 70 percent solids by volume.
25. The method of claim 24, wherein the lubricant comprises:
about 15 to 50 percent solids by volume.

9-1075706-20073-00 4000000 2007-01-01-2007-12-31

26. The method of claim 1 or 2, wherein the lubricant comprises:
about 5 to 80 percent graphite;
about 5 to 80 percent molybdenum disulfide;
about 1 to 40 percent PTFE; and
about 1 to 40 percent silicone polymers.
27. The method of claim 1 or 2, wherein the lubricant comprises one or more of:
ester;
sulfurized oil;
alkanolamides;
amine;
amine salt;
olefin;
polyolefins;
C-8 to C-18 linear alcohol;
derivative of C-8 to C-18 linear alcohol including ester;
derivative of C-8 to C-18 linear alcohol including amine;
derivative of C-8 to C-18 linear alcohol including carboxylate;
sulfonate;
polyethylene glycol;
silicone;
siloxane;
dinonyl phenol;
ethylene oxide block copolymer; and
propylene oxide block copolymer.
28. Apparatus, comprising:
a preexisting structure; and
at least one tubular member coupled to the preexisting structure by the process of:
coating the interior surface of the at least one tubular member with a lubricant;
positioning the coated at least one tubular member within a preexisting structure;
and
radially expanding the coated at least one tubular member into contact with the

PROCESSED BY THE PATENT OFFICE

preexisting structure using an expansion cone that engages the coating.

29. Apparatus, comprising:
 a preexisting structure; and
 at least one tubular member coupled to the preexisting structure by the process of:
 5 coating the interior surface of the at least one tubular member with a first part of a
 lubricant;
 positioning the at least one tubular member within a preexisting structure;
 circulating a fluidic material having a second part of the lubricant into contact with
 the coating of the first part of the lubricant; and
 10 radially expanding the coated at least one tubular member into contact with the
 preexisting structure using an expansion cone that engages the coating.
30. The apparatus of claim 28 or 29, wherein the at least one tubular member
 comprises a wellbore casing.
31. The apparatus of claim 28 or 29, wherein the at least one tubular member
 15 comprises an underground pipe.
32. The apparatus of claim 28 or 29, wherein the at least one tubular member
 comprises a structural support.
33. The apparatus of claim 28, wherein the coating of lubricant is chemically bonded to
 the interior surface of the at least one tubular member.
- 20 34. The apparatus of claim 28, wherein the coating of lubricant is mechanically bonded
 to the interior surface of the at least one tubular member.
35. The apparatus of claim 28, wherein the coating of lubricant is adhesively bonded to
 the interior surface of the at least one tubular member.
- 25 36. The apparatus of claim 28, wherein the coating of lubricant includes:
 a primer coating coupled to the interior surface of the at least one tubular member;
 and
 a coating of an antifriction paste coupled to the primer.

7.10.2017 17:40 (maximal 4.200.000.000.000)

37. The apparatus of claim 28, wherein the coating of lubricant includes, in parts by weight:
40-80 epoxy resin, 15-30 molybdenum disulfide, 10-15 graphite, 5-10 aluminum, 5-10 copper, 8-15 aluminosilicate, and 5-10 polyethylenepolyamine.
38. The apparatus of claim 28 or 29, wherein the lubricant comprises a metallic soap.
39. The apparatus of claim 28 or 29, wherein the lubricant comprises zinc phosphate.
40. The apparatus of claim 28 or 29, wherein the lubricant provides a coefficient of dynamic friction of between about 0.08 to 0.1.
41. The apparatus of claim 28 or 29, wherein the lubricant comprises one or more of:
sodium stearates, calcium stearates, zinc stearates, zinc phosphate, manganese phosphate, C-Lube-10, C-Phos-58-M, C-Phos-58-R, polytetrafluoroethylene, molybdenum disulfide, and metallic soaps.
42. The apparatus of claim 28 or 29, wherein the lubricant provides a sliding coefficient of friction less than about 0.20.
43. The apparatus of claim 28 or 29, wherein the lubricant comprises one or more of:
polyacrylamide polymers, AMPS-acrylamide copolymers, modified cellulose derivatives, hydroxyethylcellulose, carboxymethyl hydroxyethyl cellulose, polyvinyl alcohol polymers, polyvinyl acetate polymers, polyvinyl alcohol acetate copolymers, polyvinyl vinyl acetate copolymers, polyvinyl pyrrolidone and copolymers including polyolefins, latexes, styrene butadiene latex, urethane latexes, styrene-maleic anhydride copolymers, viscosity index improvers for motor oils, polyacrylate esters, block copolymers including styrene, block copolymers including isoprene butadiene, block copolymers including ethylene, and ethylene acrylic acid copolymers.
44. The apparatus of claim 28 or 29, wherein the lubricant comprises one or more of:
graphite, molybdenum disulfide, lead powder, antimony oxide, polytetrafluoroethylene, and silicone polymers.

P:\CPL\2005\07\140\examined\claims\20-07-05

45. The apparatus of claim 28, wherein the coating of lubricant comprises:
a solid lubricant; and
a binder.
46. The apparatus of claim 45, wherein the binder is selected from:
5 epoxy, acrylic, urea-formaldehyde, melamine formaldehyde, furan based resin,
acetone formaldehyde, phenolic, alkyd resins, and silicone modified alkyd resin.
47. The apparatus of claim 45, wherein the binder is selected from:
vinyl acetate, vinyl chloride, maleic anhydride, maleic acid, ethylene-acrylic acid
10 copolymers, ethylene-methacrylic acid copolymers, and ethylene-vinyl acetate
copolymers.
48. The apparatus of claim 28 or 29, wherein the lubricant comprises a suspension of
particles in a carrier solvent.
49. The apparatus of claim 28 or 29, wherein the lubricant comprises one or more of:
manganese phosphate, zinc phosphate, and iron phosphate.
- 15 50. The apparatus of claim 28 or 29, wherein the lubricant comprises:
about 1 to 90 percent solids by volume.
51. The apparatus of claim 50, wherein the lubricant comprises:
about 5 to 70 percent solids by volume.
52. The apparatus of claim 51, wherein the lubricant comprises:
20 about 15 to 50 percent solids by volume.
53. The apparatus of claim 28 or 29, wherein the lubricant comprises:
about 5 to 80 percent graphite;
about 5 to 80 percent molybdenum disulfide;
about 1 to 40 percent PTFE; and
25 about 1 to 40 percent silicone polymers.
54. The apparatus of claim 28 or 29, wherein the lubricant comprises one or more of
the following:

P:\OFFICE\67872\00 standard of disclosure\67872

ester;
 sulfurized oil;
 alkanolamides;
 amine;
 5 amine salt;
 olefin;
 polyolefins;
 C-8 to C-18 linear alcohol;
 derivative of C-8 to C-18 linear alcohol including ester;
 10 derivative of C-8 to C-18 linear alcohol including amine;
 derivative of C-8 to C-18 linear alcohol including carboxylate;
 sulfonate;
 polyethylene glycol;
 silicone;
 15 siloxane;
 dinonyl phenol;
 ethylene oxide block copolymer; and
 propylene oxide block copolymer.

20 55. A method of coupling an expandable tubular assembly including at least one
 tubular member to a preexisting structure, the method being according to claim 1 or
 2, substantially as hereinbefore described with reference to the accompanying
 drawings.

25 56. Apparatus according to claim 28 or 29, substantially as hereinbefore described with
 reference to the accompanying drawings.

DATED this 20th day of July, 2005

Shell Internationale Research Maatschappij B.V.

By DAVIES COLLISON CAVE

30 Patent Attorneys for the Applicant

1/4

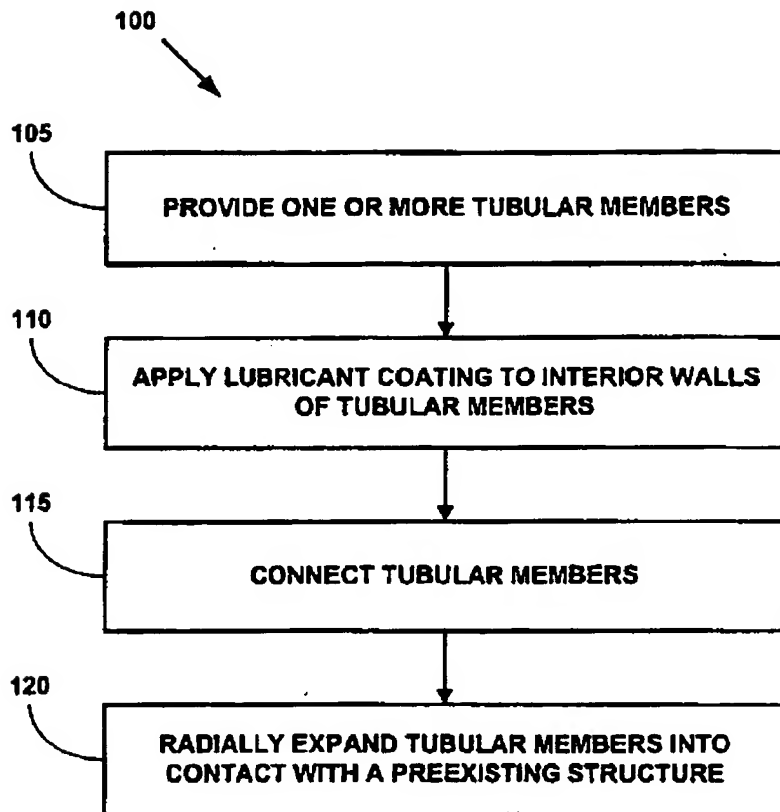


FIGURE 1

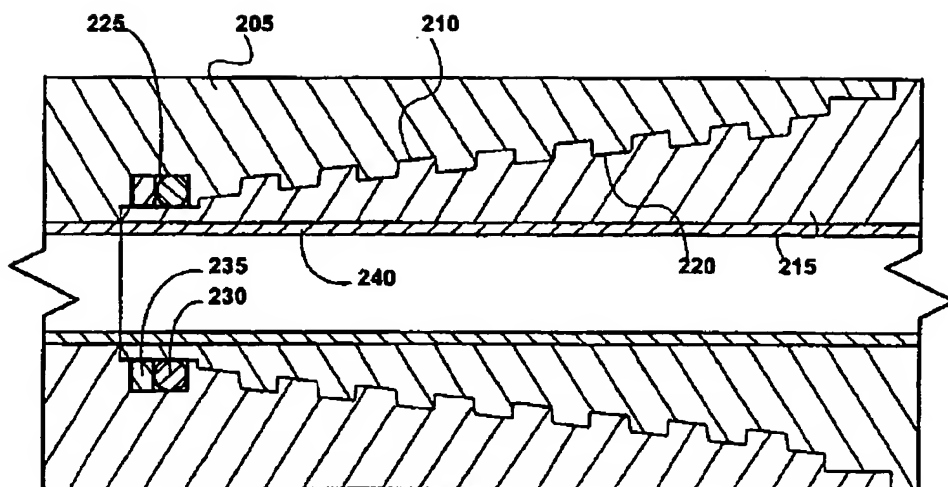


FIGURE 2

3/4

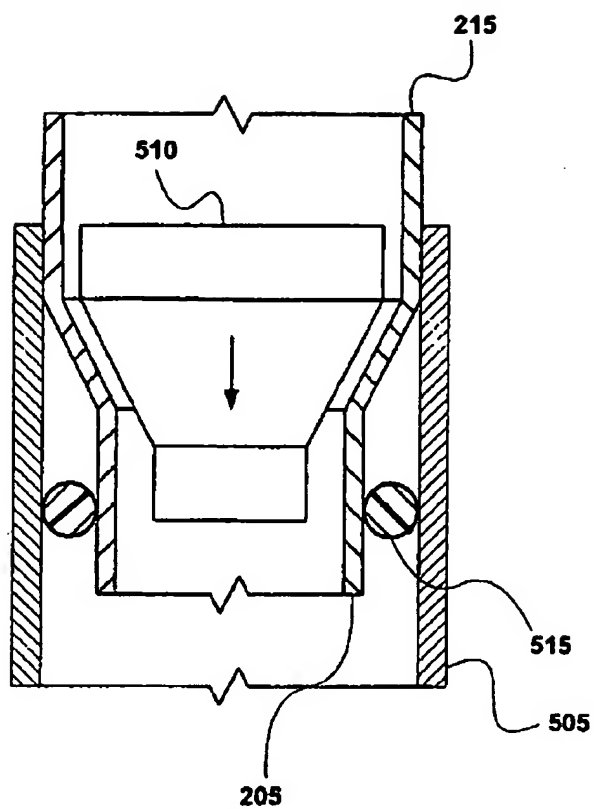


FIGURE 3

4/4

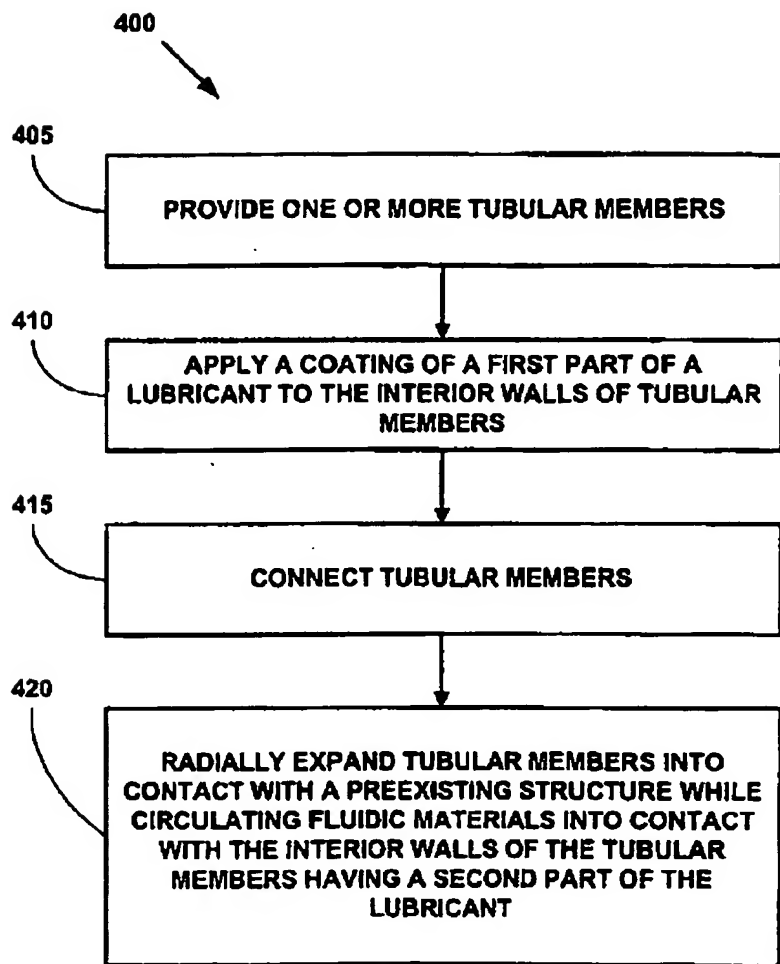


FIGURE 4